

# Tech Specs

UniFi UISP Branding

UniFi Cloud Gateways

WiFi

Switching

Cloud Keys & Gateways

Camera Security

Door Access

Phone System


New Integrations

Accessories

airMAX Rocket Prism 2AC

Datasheet

Marketing Images

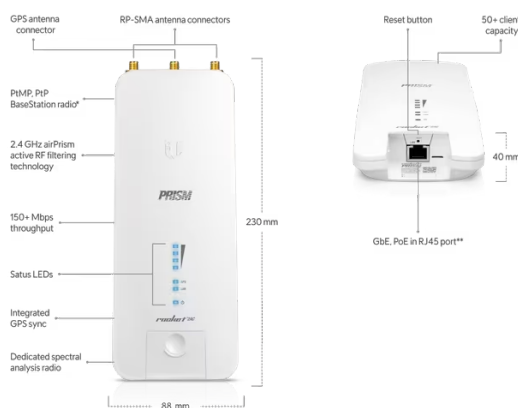

\*Compatible with airMAX ac devices.  
\*\*24V DC, 1A GbE PoE adapter included.

## Mechanical

Dimensions	88 x 40 x 230 mm (3.47 x 1.58 x 9.06")
Weight	400 g (14.11 oz)
Enclosure material	Die-cast aluminum

## Hardware

Networking interface	(1) GbE RJ45 port
Power method	Passive PoE (pairs 4, 5+; 7, 8 return)
Power supply	24V, 0.5A Gigabit PoE adapter (Included)
Max. power consumption	9.5W
RF connectors	(2) RP-SMA (waterproof) (1) GPS (waterproof)
LEDs	Power, LAN, (4) signal strength
ESD/EMP Protection	Air/contact $\pm 24\text{kVt}$
Shock and vibrations	ETS1300-019-1.4
Operating temperature	-40 to 80° C (-40 to 176° F)
Operating humidity	5 to 95% noncondensing
Certifications	CE, FCC, IC

## Operating Frequency (MHz)

Worldwide	2412 - 2472 MHz
US/CA	2412 - 2462 MHz

---

## Management Radio (MHz)

Worldwide	5150 - 5250 MHz
US/CA	U-NII-3: 5725 - 5850 MHz

### Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.